

# Revox

## True studio sound quality

### Revox M100

A complete audiophile stereo system is located behind the compact 18 x 18 cm glass front of the Revox M100. The powerful 2 x 200 watt output, allows you to experience your favourite music or radio station in incredible sound quality. In combination with Revox speakers, the M100 can optimise the frequency response and reproduce the sound without any loss of clarity. The HDMI video output with 1080p, brings DVDs to the flat screen with high-resolution pictures in Full HD quality. Four digital and two analogue inputs allow easy integration of additional sound sources.

Using the additional M100 modules you can expand your system step by step up to the integration into the Revox Multiuser System and thus add new functions easily.



Revox M100




Revox M100 expanded by modules



Revox M100 connections

### Technical data:

#### Revox M100

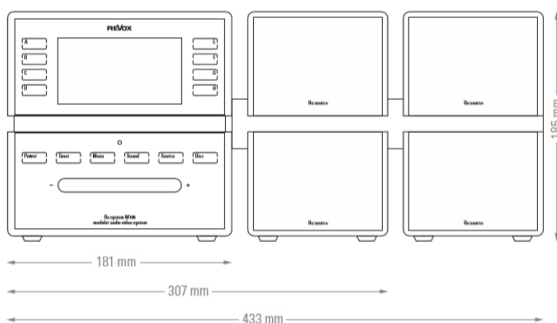

|                           |   |
|---------------------------|---|
| Dimensions basis 1        | H 185 x W 181 x D 340 mm                        |
| Weight basis 1            | 13 kg   |
| Dimensions module         | H 84 x W 113 x D 340                            |
| Weight module             | 2.5 kg  |
| Fuse rating               | 230 V 3.15 A<br>115 V 6.3 A                     |
| Power consumption         | Max. 500 Watt                                   |
| Basis 1 operation         | Operation 30 Watt                               |
| Standby                   | 0.75 Watt                                       |
| Output power              | 2 x 170 Watt RMS at 4 Ohm<br>2 x 220 Watt Music |
| Frequency response (-3db) | 5 Hz – 55 kHz                                   |
| Suppression factor        | 660   |
| Harmonic distortion       | 0.003 % at 100 Watt at 4 Ohm                    |
| Headphone output          | Impedance >= 8 Ohm (I = 130 mA max.)            |